


RHINO-RACK

Steel Eurobar to Leg Fitment Supplement


- Important:**
- ☐ 1. Please refer to your fitting instruction to ensure that the roof racks are installed in the correct locations.
 - ☐ 2. Check the contents of kits before commencing fitment and report any discrepancies.
 - ☐ 3. Place these instructions in the vehicle's glove box after installation is complete.
 - ☐ 4. These instructions must be followed for warranty to be upheld.

SXB Instructions

- 1** Unlock the leg and unwind the leg to expose 10-12mm of thread on the adjustment rod as shown.

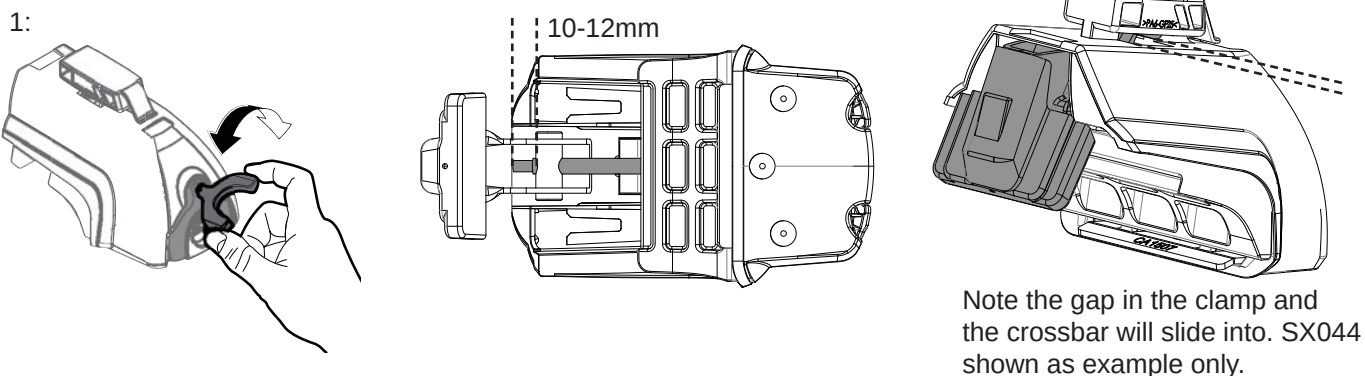



- 2** 1: Slide the leg into the crossbar. Note the position of the metal clamp. Wind the adjustment rod back up slightly to prepare the assembly to be installed on the roof.

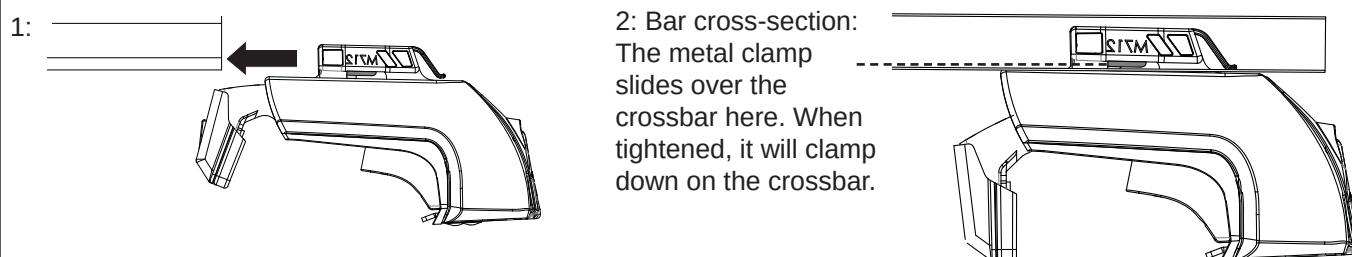

SX Instructions

- 1** Flex the grip tabs inwards slightly on the SX leg assembly. With the tab depressed, insert the leg into the crossbar as shown.




Depress the Tabs.

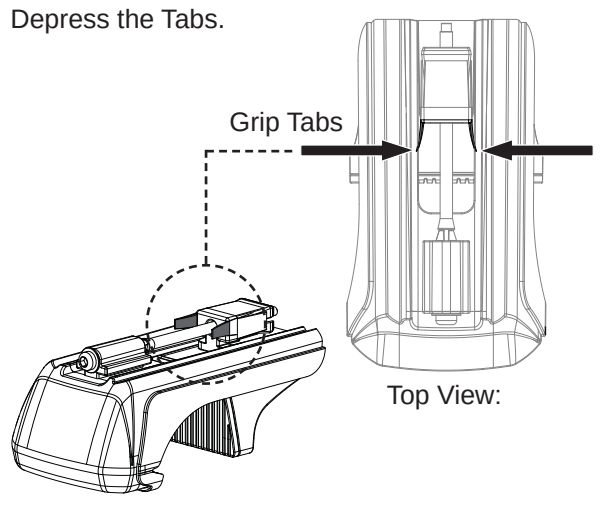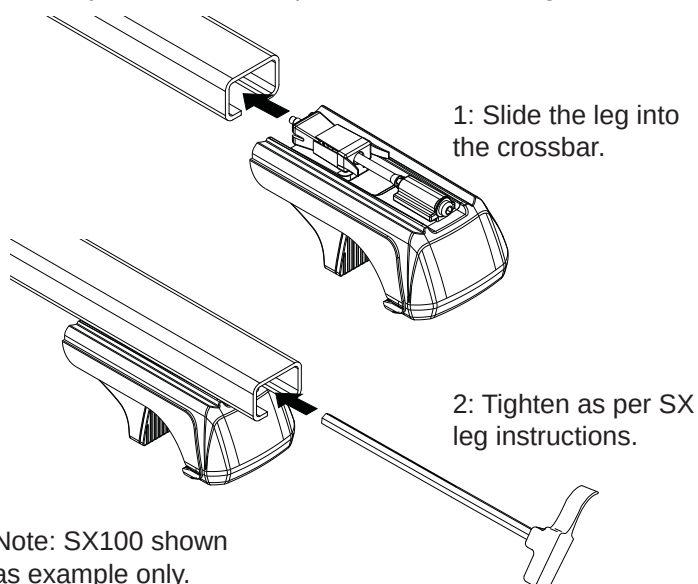


Steel Eurobar to Leg Fitment Supplement

Complete crossbar install.

- 1 Measure the slots on either side of the installed Leg Assembly. Cut the Underbar Strips to size and fit to the slots.

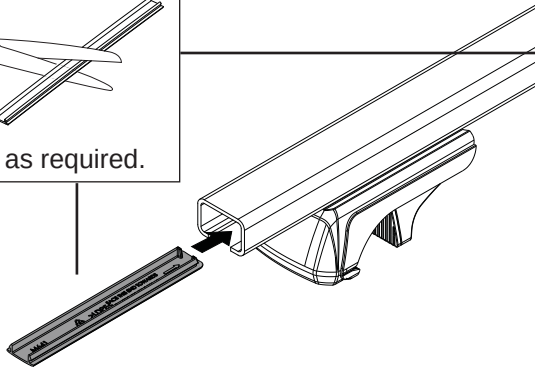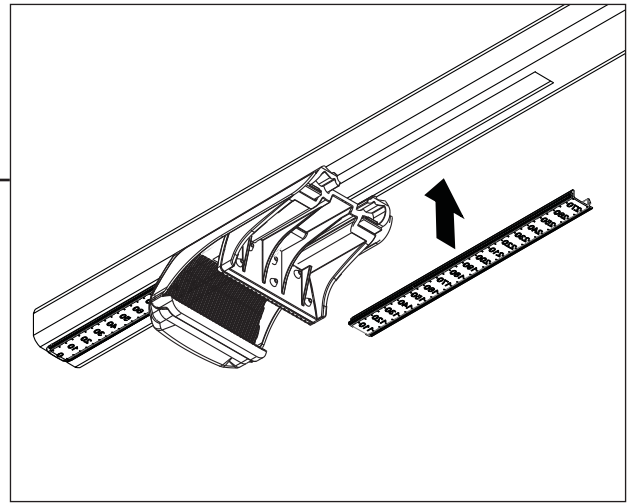

- 2 Install the crossbar to the vehicle as per the corresponding leg kit instructions. Install end caps as shown.

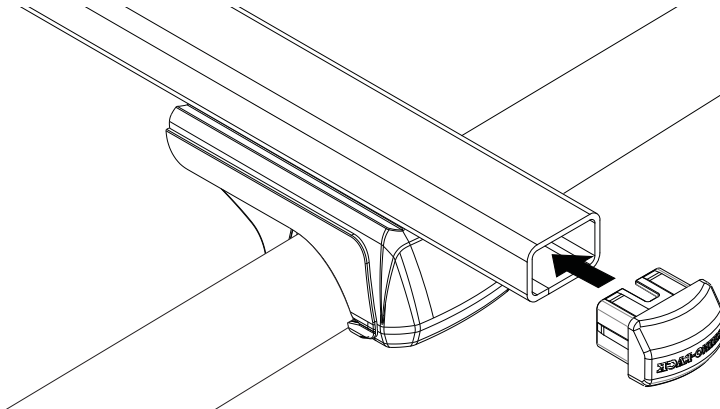

Rhino-Rack
3 Pike Street, Rydalmere,
NSW 2116, Australia.
(Ph) (02) 9638 4744
(Fax) (02) 9638 4822

Document No: R1747
Prepared By: Kayle Everett
Authorised By: Chris Murty

Fit Time: 15min
Issue No: 01
Issue Date: 08/03/2018

These instructions remain the property of Rhino-Rack Australia Pty. Ltd. and may not be used or changed for any other purpose than intended.