

DK314 Rhino-Rack VA, Euro & HD crossbar instruction


IDENTIFICATION CHART







VA crossbar



EURO crossbar



HD crossbar

			FRONT CROSSBAR						***REAR CROSSBAR***					
					***VA***	***EURO***	***HD***				***VA***	***EURO***	***HD***	
Vehicle	**Date**	**Crossbar**	**Front Right Pad/ Clamp**	**Front Left Pad/ Clamp**	**Measurement strip length per side**	**Measurement strip length per side**	**Measurement Distance (x)**	**Foot plate arrow direction**	**Rear Right Pad/ Clamp**	**Rear Left Pad/ Clamp**	**Measurement strip length per side**	**Measurement strip length per side**	**Measurement Distance (x)**	**Foot plate arrow direction**
Audi A8L 4dr sedan 4H	2010-	1260mm	M415 SUB0148	M414 SUB0148	184mm	71mm	1016mm / 40”	OUT	M414 SUB0197	M415 SUB0197	179mm	66mm	1006mm / 39,39/64”	OUT
			Arrow OUT						Arrow OUT					

DK314 Rhino-Rack VA, Euro & HD crossbar instruction


Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.


Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated up to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.


If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

Pad M414 Front Left. Arrow out.
Pad M415 Front Right. Arrow out.
Pad M415 Rear Left. Arrow out.
Pad M414 Rear Right. Arrow out.

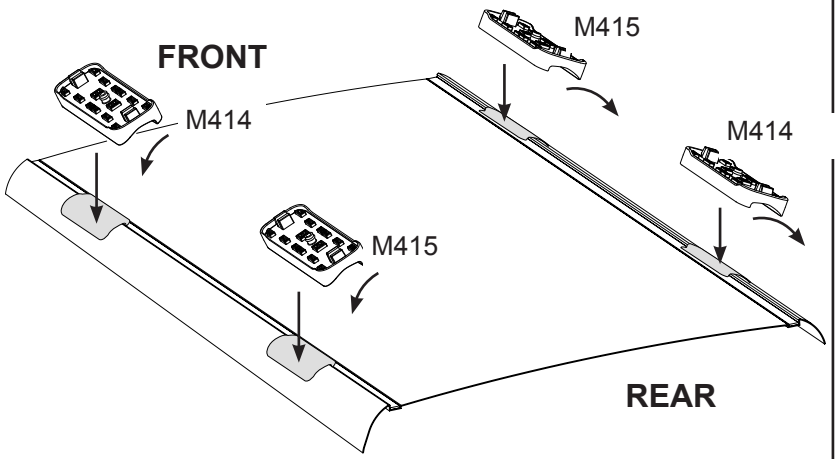

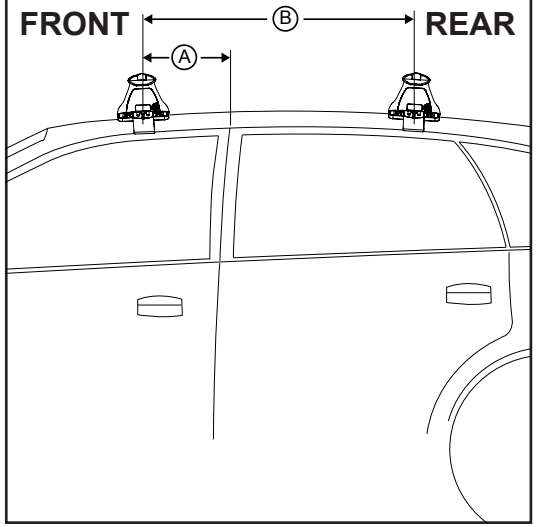

Direction of Pad, Arrow and Foot Plates

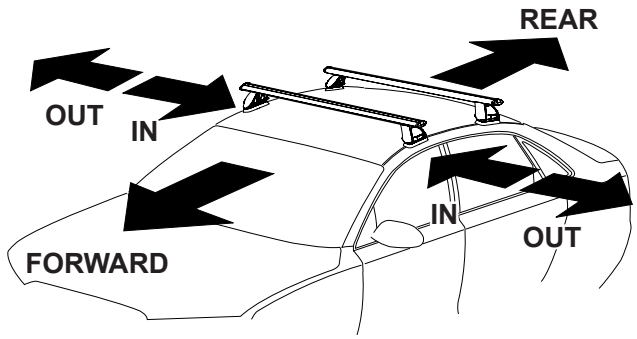

VEHICLE	Date	Measurement A	Measurement B	Load Rating Up to (includes racks 5kg/ 11lbs)
Audi A8L 4dr sedan 4H	2010-	220mm / 8,21/32”	750mm / 29,17/32”	75kg / 165lbs