

Rhino Rack 2500 Series - DK394 instruction


IDENTIFICATION CHART




VA crossbar











DA crossbar



EURO crossbar



HD crossbar

			FRONT CROSSBAR						REAR CROSSBAR					
					 VA	 DA EURO	 HD			 VA	 DA EURO	 HD		
Vehicle	Date	Crossbar	Front Right Pad/ Clamp	Front Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/ Clamp	Rear Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
Lexus CT/ CT F Sport 5dr hatch (ZWA10R)	2011-	1180mm	M506 SUB0144	M505 SUB0144	170mm	115mm	908mm / 35,3/4”	OUT	M368 SUB0144	M368 SUB0144	167mm	112mm	902mm / 35,33/64 ”	OUT
			Pad Arrow OUT						Pad Arrow OUT					

Rhino Rack 2500 Series - DK394 instruction


Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.


Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.


Pad M505	FRONT Left of vehicle	Arrow facing outward
Pad M506	FRONT Right of vehicle	Arrow facing outward
Pad M368	REAR Right of vehicle	Arrow facing outward
Pad M368	REAR Left of vehicle	Arrow facing outward

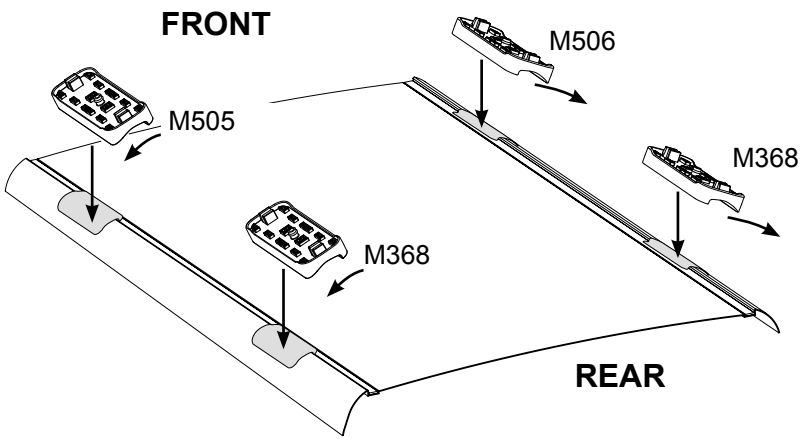


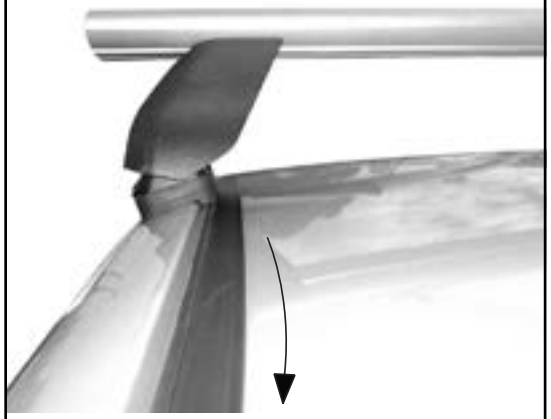

FRONT RIGHT

Direction of Pad Arrow and Foot Plate Arrow

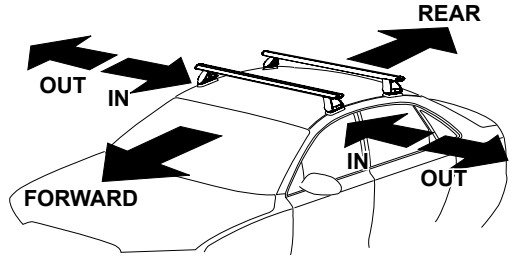

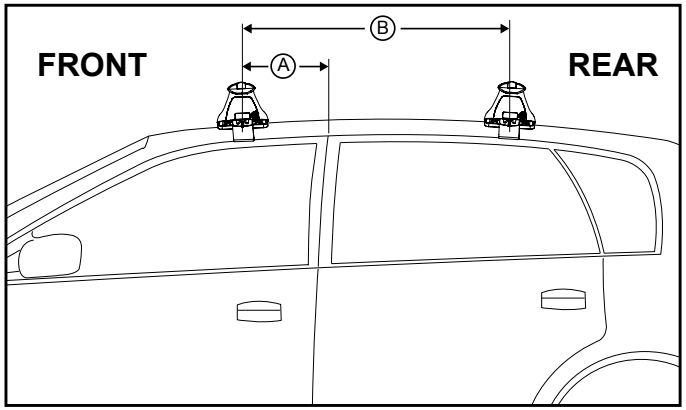

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Lexus CT/CT F Sport 5dr hatch (ZWA10R)	2011-	350mm / 13,25/32”	690mm / 27,11/64”	75kg / 165lbs