

Rhino Rack 2500 Series - DK449 instruction


CROSSBAR IDENTIFICATION









VA crossbar



EURO crossbar



HD crossbar

			FRONT CROSSBAR						REAR CROSSBAR					
					 VA	 EURO	 HD				 VA	 EURO	 HD	
Vehicle	**Date**	**Crossbar**	**Front Right Pad/Clamp**	**Front Left Pad/Clamp**	**Measurement strip length per side**	**Measurement strip length per side**	**Measurement Distance (x)**	**Foot plate arrow direction**	**Rear Right Pad/Clamp**	**Rear Left Pad/Clamp**	**Measurement strip length per side**	**Measurement strip length per side**	**Measurement Distance (x)**	**Foot plate arrow direction**
Toyota Rav4 Gen 4, XA40 5dr SUV	12-19	1260mm	M435 SUB0661	M436 SUB0661	202mm	89mm	1052mm / 41,27/64”	OUT	M506 SUB0368	M505 SUB0368	155mm	42mm	958mm / 37,23/32”	OUT
			Pad Arrow OUT						Pad Arrow OUT					

Rhino Rack 2500 Series - DK449 instruction

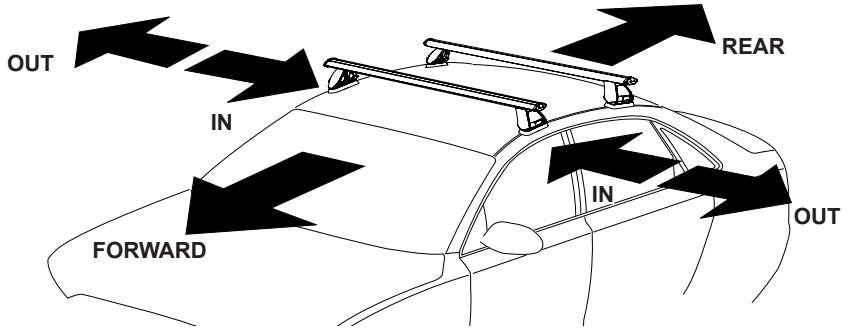
Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

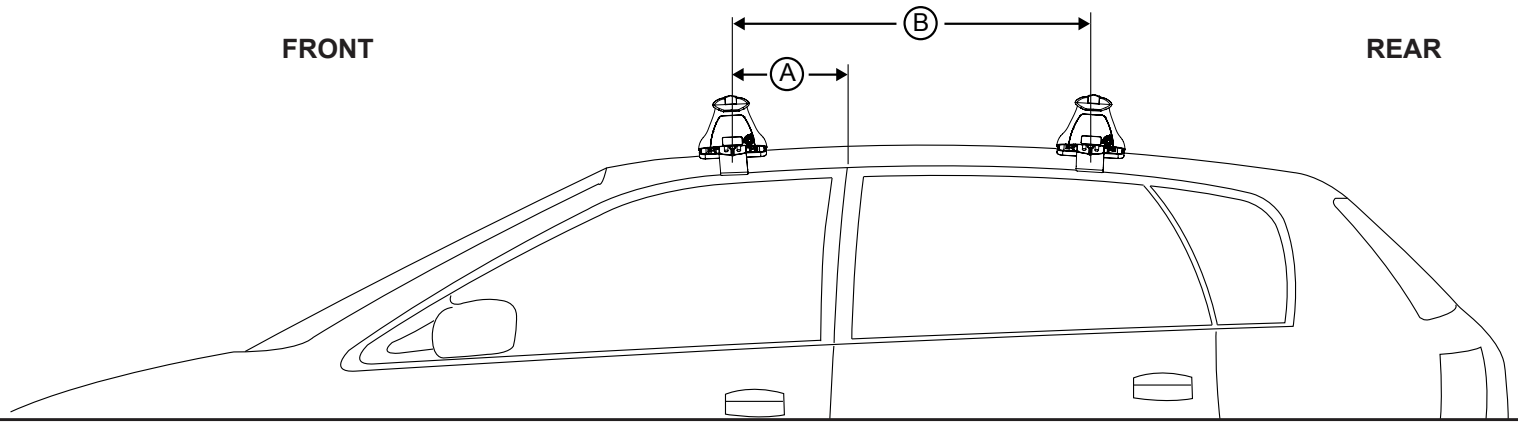
Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

Direction of Pad Arrow and Foot Plate Arrow





VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/ 11lbs)
Toyota Rav4 Gen 4, XA40 5dr SUV	12-19	250mm / 9,27/32”	800mm / 31,1/2”	75kg / 165lbs