

Rhino Rack 2500 Series - DK453 instruction


CROSSBAR IDENTIFICATION









VA crossbar



EURO crossbar



HD crossbar

			FRONT CROSSBAR						REAR CROSSBAR					
					VA 	EURO 	HD 			VA 	EURO 	HD 		
Vehicle	**Date**	**Crossbar**	**Front Right Pad/Clamp**	**Front Left Pad/Clamp**	**Measurement strip length per side**	**Measurement strip length per side**	**Measurement Distance (x)**	**Foot plate arrow direction**	**Rear Right Pad/Clamp**	**Rear Left Pad/Clamp**	**Measurement strip length per side**	**Measurement strip length per side**	**Measurement Distance (x)**	**Foot plate arrow direction**
Hionda Civic 4dr sedan 10th Gen	16-	1260mm	M282 SUB0574	M281 SUB0574	144mm	31mm	936mm / 36,27/32”	OUT	M284 SUB0459	M283 SUB0459	128mm	15mm	998mm / 39,19/64”	OUT
			Pad Arrow FORWARD						Pad Arrow FORWARD					

Rhino Rack 2500 Series - DK453 instruction

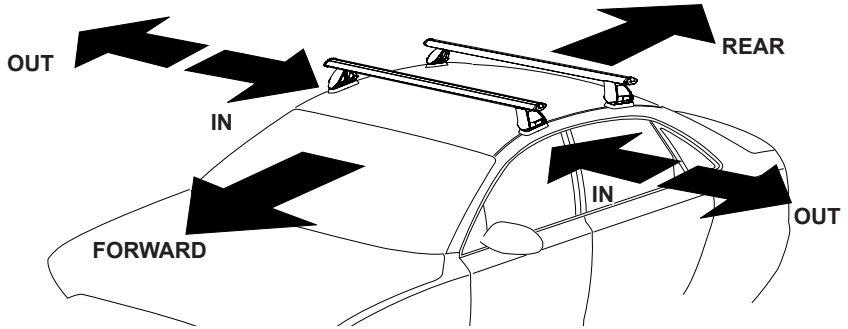
Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

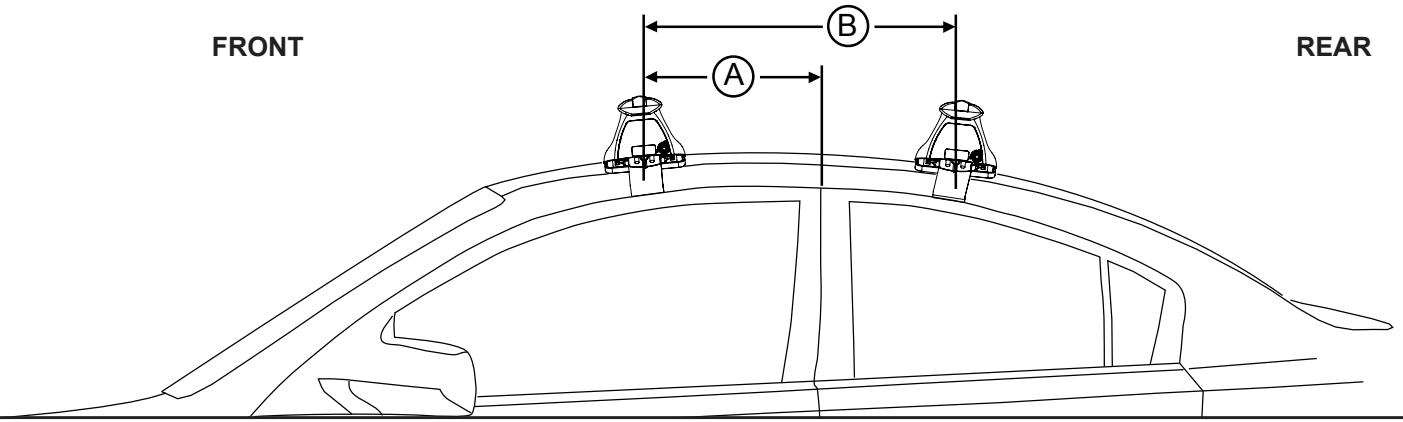
Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated up to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

Direction of Pad Arrow and Foot Plate Arrow





VEHICLE	Date	Measurement A	Measurement B	Load Rating up to (includes racks 5kg/ 11lbs)
Honda Civic 4DR sedan 10th Gen	16-	300mm / 11,13/16”	700mm / 27,9/16”	75kg / 165lbs