





DK051 Rhino-Rack VA, Aero, Euro & HD crossbar instruction


IDENTIFICATION CHART




VA crossbar



AERO crossbar






EURO crossbar



HD crossbar

FRONT CROSSBAR




AERO




EURO



HD



REAR CROSSBAR




AERO

EURO



HD



Vehicle	Date	Crossbar	Front Right Pad/ Clamp	Front Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/ Clamp	Rear Left Pad/ Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
Ford Laser Sedan	10/94-03/99	1180mm	M366 SUB0146		181mm	126mm	930mm	OUT	M366 SUB0145		171mm	116mm	910mm	OUT
			Arrow FORWARD						Arrow FORWARD					




DK051 Rhino-Rack VA, Aero, Euro & HD crossbar instruction

Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.


Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

If your vehicle is not listed on this fitting instruction please refer to your countries Rhino-Rack web site for the latest information.

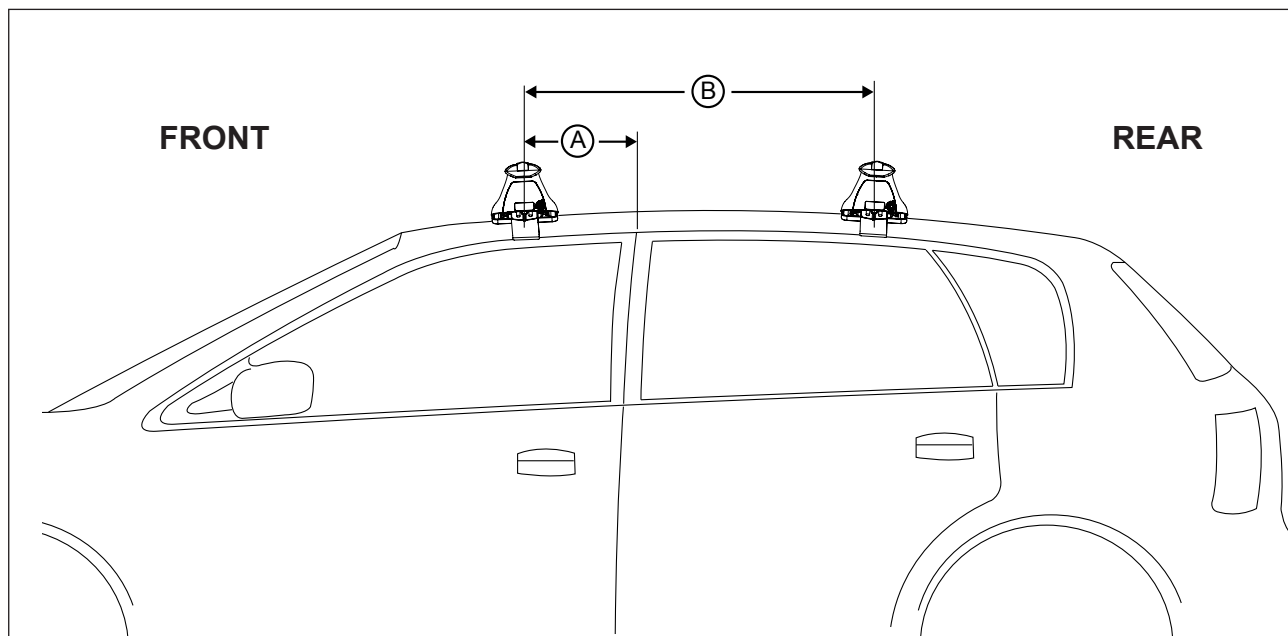

Direction of Pad, Arrow and Foot Plates

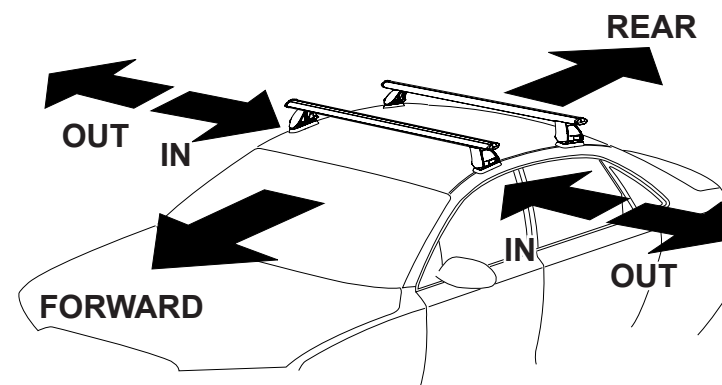

VEHICLE	Date	Measurement A	Measurement B	Load Rating (includes racks 5kg/11lbs)
Ford Laser Sedan	10/94-03/99	300mm	700mm	75kg