

YAKIMA


BaseClip 135

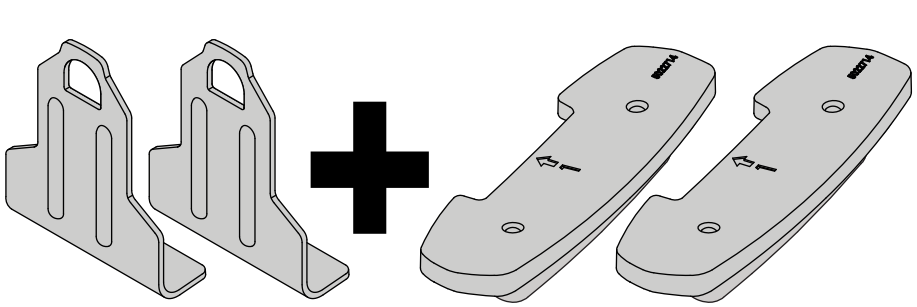

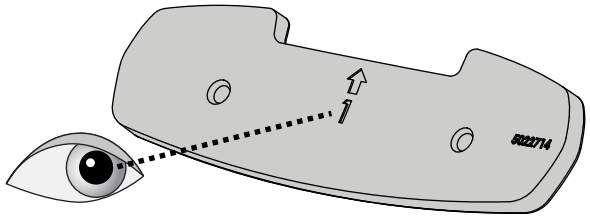

PAD NUMBER:
NUMÉRO DU PATIN:
NÚMERO DE LA ALMOHADILLA:

CLIP NUMBER:
NUMÉRO DU CROCHET:
NÚMERO DE CLIP:

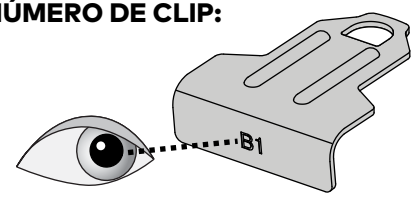

Look at the notes that apply to your vehicle.

Consultez les notes qui concernent votre véhicule.

Lea la información que se refiere a su vehículo.

If your vehicle doesn't appear here go to yakimatech.com

Si votre véhicule n'apparaît pas ici, consulter le site yakimatech.com

Si su vehículo no aparece aquí, visite yakimatech.com

	MAX. LBS.	M1			M2	P1	T1	M3			M4	P2	T2
					inches						inches		
--ACURA--													
TLX 4dr 2015-2020 (BaseLine)	165	BC135	B10	1	39 7/8	A	2	BC151	B41	1	36 5/8	B	3
TLX 4dr 2015-2020 (BaseLine FX)	165	BC135	B10	1	39 7/8	A	2	BC151	B41	1	36 5/8	B	3
--BMW--													
X4 5dr 2019-2025 (BaseLine)	165	BC135	B10	1	41 1/2	A	1	BC161	B49	1	36 3/4	C	2
X4 5dr 2019-2025 (BaseLine FX)	165	BC135	B10	1	41 1/2	A	1	BC161	B49	1	36 3/4	C	2
--CHRYSLER--													
300 4dr 2005-2010 (BaseLine)	165	BC135	B10	1	39 1/8	A	2	BC135	B10	1	39	B	2
300 4dr 2005-2010 (BaseLine FX)	165	BC135	B10	1	39 1/8	A	2	BC135	B10	1	39	B	2
--DODGE--													
Avenger 4dr 2008-2014 (BaseLine)	165	BC135	B10	1	40 5/8	A	1	BC135	B10	1	39 7/8	C	2
Avenger 4dr 2008-2014 (BaseLine FX)	165	BC135	B10	1	40 5/8	A	1	BC135	B10	1	39 7/8	C	2
Ram 1500 Crew Cab 4dr 2009-2010 (65.50" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 1500 Crew Cab 4dr 2009-2010 (74.25" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 1500 Crew Cab 4dr 2009-2010 (96.50" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 1500 Crew Cab 4dr 2009-2010 (65.50" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 1500 Crew Cab 4dr 2009-2010 (74.25" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 1500 Crew Cab 4dr 2009-2010 (96.50" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 1500 Quad Cab 4dr 2009-2010 (65.50" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 1500 Quad Cab 4dr 2009-2010 (74.25" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 1500 Quad Cab 4dr 2009-2010 (96.50" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 1500 Quad Cab 4dr 2009-2010 (65.50" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 1500 Quad Cab 4dr 2009-2010 (74.25" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 1500 Quad Cab 4dr 2009-2010 (96.50" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 2500/3500 Crew Cab 4dr 2010-2010 (74.25" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2
Ram 2500/3500 Crew Cab 4dr 2010-2010 (96.50" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	B	2	BC135	B10	1	46 1/4	B	2

NOTES
NOTAS







	MAX. LBS.				M1	M2	P1	T1				M3	M4	P2	T2
Ram 2500/3500 Crew Cab 4dr 2010-2010 (74.25" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
Ram 2500/3500 Crew Cab 4dr 2010-2010 (96.50" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
Ram 2500/3500 Mega Cab 4dr 2010-2010 (74.25" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
Ram 2500/3500 Mega Cab 4dr 2010-2010 (96.50" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
Ram 2500/3500 Mega Cab 4dr 2010-2010 (74.25" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
Ram 2500/3500 Mega Cab 4dr 2010-2010 (96.50" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
--FORD--															
Focus 4dr 2000-2007 (BaseLine)	165	BC119	B2	1	35 1/8	7	A	2	BC135	B10	1	34 3/8	32	C	2
Focus 4dr 2000-2007 (BaseLine FX)	165	BC119	B2	1	35 1/8	7	A	2	BC135	B10	1	34 3/8	32	C	2
Focus 4dr 2008-2011 (BaseLine)	165	BC119	B2	1	35 1/8	7	A	2	BC135	B10	1	34 3/8	32	C	2
Focus 4dr 2008-2011 (BaseLine FX)	165	BC119	B2	1	35 1/8	7	A	2	BC135	B10	1	34 3/8	32	C	2
Focus 5dr 2012-2018 (BaseLine)	165	BC135	B10	1	38 7/8	8	A	2	BC105	B36	1	36 3/8	32	C	2
Focus 4dr 2012-2018 (BaseLine)	165	BC135	B10	1	38 7/8	8	A	2	BC105	B36	1	36 3/8	32	C	2
Focus 5dr 2012-2018 (BaseLine FX)	165	BC135	B10	1	38 7/8	8	A	2	BC105	B36	1	36 3/8	32	C	2
Focus 4dr 2012-2018 (BaseLine FX)	165	BC135	B10	1	38 7/8	8	A	2	BC105	B36	1	36 3/8	32	C	2
--INFINITI--															
QX50 5dr 2014-2018 (BaseLine)	165	BC135	B10	1	38 3/8	7	A	1	BC159	B41	4	34 1/4	32	C	2
QX50 5dr 2014-2018 (BaseLine FX)	165	BC135	B10	1	38 3/8	7	A	1	BC159	B41	4	34 1/4	32	C	2
--LINCOLN--															
MKS 4dr 2009-2016 (BaseLine)	165	BC135	B10	1	41	7	A	1	BC135	B10	1	39 1/2	32	B	2
MKS 4dr 2009-2016 (BaseLine FX)	165	BC135	B10	1	41	7	A	1	BC135	B10	1	39 1/2	32	B	2
--NISSAN--															
Altima 4dr 2007-2012 (BaseLine)	165	BC135	B10	1	36 3/4	9	A	1	BC135	B10	1	35 1/2	30	C	2
Altima 4dr 2007-2012 (BaseLine FX)	165	BC135	B10	1	36 3/4	9	A	1	BC135	B10	1	35 1/2	30	C	2
Maxima 4dr 2004-2008 (BaseLine)	165	BC135	B10	1	37 5/8	9	A	1	BC142	B19	1	37	32	C	2
Maxima 4dr 2004-2008 (BaseLine FX)	165	BC135	B10	1	37 5/8	9	A	1	BC142	B19	1	37	32	C	2
Rogue Select 5dr 2014-2015 (BaseLine)	165	BC123	B84	4	38 1/8	13	A	2	BC135	B10	1	38	32	B	2
Rogue Select 5dr 2014-2015 (BaseLine FX)	165	BC123	B84	4	38 1/8	13	A	2	BC135	B10	1	38	32	B	2
Rogue 5dr 2008-2010 (BaseLine)	165	BC123	B84	4	38 1/8	13	A	2	BC135	B10	1	38	32	B	2
Rogue 5dr 2008-2010 (BaseLine FX)	165	BC123	B84	4	38 1/8	13	A	2	BC135	B10	1	38	32	B	2
Rogue 5dr 2011-2013 (BaseLine)	165	BC123	B84	4	38 1/8	13	A	2	BC135	B10	1	38	32	B	2
Rogue 5dr 2011-2013 (BaseLine FX)	165	BC123	B84	4	38 1/8	13	A	2	BC135	B10	1	38	32	B	2
--RAM--															
1500 Classic Crew Cab with Ram Box 4dr 2019-2022 (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Classic Crew Cab with Ram Box 4dr 2019-2022 (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Classic Crew Cab 4dr 2019-2024 (76.00" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Classic Crew Cab 4dr 2019-2024 (67.00" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Classic Crew Cab 4dr 2019-2024 (76.00" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Classic Crew Cab 4dr 2019-2024 (67.00" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Classic Quad Cab with Ram Box 4dr 2019-2022 (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Classic Quad Cab with Ram Box 4dr 2019-2022 (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Classic Quad Cab 4dr 2019-2024 (76.00" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Classic Quad Cab 4dr 2019-2024 (76.00" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Crew Cab with Ram Box 4dr 2011-2018 (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Crew Cab with Ram Box 4dr 2011-2018 (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Crew Cab with Ram Box 4dr 2019-2025 (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Crew Cab with Ram Box 4dr 2019-2025 (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Crew Cab 4dr 2011-2018 (67.00" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Crew Cab 4dr 2011-2018 (76.00" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Crew Cab 4dr 2011-2018 (67.00" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Crew Cab 4dr 2011-2018 (76.00" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Crew Cab 4dr 2019-2025 (65.50" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Crew Cab 4dr 2019-2025 (74.75" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Crew Cab 4dr 2019-2025 (65.50" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Crew Cab 4dr 2019-2025 (74.75" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Quad Cab 4dr 2011-2018 (76.00" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Quad Cab 4dr 2011-2018 (76.00" Bed) (BaseLine FX)	165	BC135	B10	1	46 1/2	10	B	2	BC135	B10	1	46 1/4	32	B	2
1500 Quad Cab 4dr 2019-2025 (74.75" Bed) (BaseLine)	165	BC135	B10	1	46 1/2	8	A	2	BC135	B10	1	46 1/8	32	B	2

NOTES
NOTAS

BaseClip Notes

NOTES
NOTAS

US NOTES

READ THE NOTES THAT APPLY TO YOUR VEHICLE:

1 - Canoes are limited to 14 feet or less on this application.

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

60 - On this application, minimum bar size can be sized down when JetStream or CoreBar are used.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

70 - Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

76 - Placement of the clips for this vehicle requires pulling a portion of the interior weather seal off from the door frame. Place the clips over the exposed steel ledge. Replace weather seal by pushing over clip and ledge.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

FR NOTES

RESPECTER LES NOTES DE MONTAGE S'APPLIQUANT À VOTRE VÉHICULE.

1 - Canoes are limited to 14 feet or less on this application.

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

60 - On this application, minimum bar size can be sized down when JetStream or CoreBar are used.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

70 - Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

76 - Placement of the clips for this vehicle requires pulling a portion of the interior weather seal off from the door frame. Place the clips over the exposed steel ledge. Replace weather seal by pushing over clip and ledge.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

ES NOTAS

LEA Y SIGA LAS OBSERVACIONES QUE CORRESPONDEN A SU VEHÍCULO.

1 - Canoes are limited to 14 feet or less on this application.

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

60 - On this application, minimum bar size can be sized down when JetStream or CoreBar are used.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

70 - Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

76 - Placement of the clips for this vehicle requires pulling a portion of the interior weather seal off from the door frame. Place the clips over the exposed steel ledge. Replace weather seal by pushing over clip and ledge.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

BaseClip Notes

NOTES
NOTAS

US NOTES

READ THE NOTES THAT APPLY TO YOUR VEHICLE:

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

117 - For use with with your LockNLoad platform, this application requires 2 pairs of LockNLoad Crossbar Clamps PN 8005039.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

187 - Boa and ForkChop bike mounts will not work on this application due to crossbar spread limitations.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24” – 50”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.

FR NOTES

RESPECTER LES NOTES DE MONTAGE S’APPLIQUANT À VOTRE VÉHICULE.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

117 - For use with with your LockNLoad platform, this application requires 2 pairs of LockNLoad Crossbar Clamps PN 8005039.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

187 - Boa and ForkChop bike mounts will not work on this application due to crossbar spread limitations.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24” – 50”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.

ES NOTAS

LEA Y SIGA LAS OBSERVACIONES QUE CORRESPONDEN A SU VEHÍCULO.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

117 - For use with with your LockNLoad platform, this application requires 2 pairs of LockNLoad Crossbar Clamps PN 8005039.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

187 - Boa and ForkChop bike mounts will not work on this application due to crossbar spread limitations.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24” – 50”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.