

YAKIMA


BaseClip 174

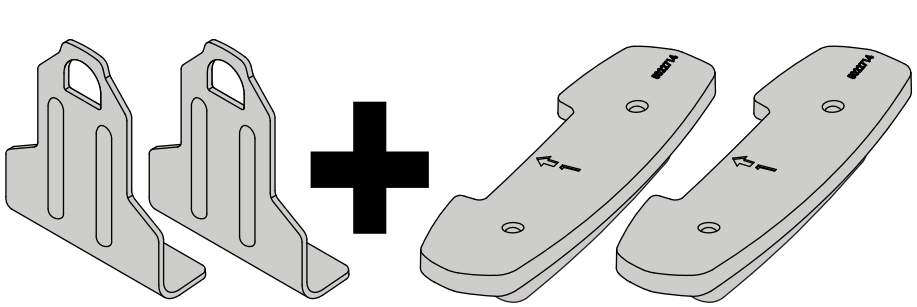

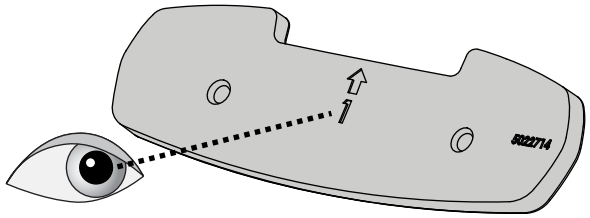

PAD NUMBER:
NUMÉRO DU PATIN:
NÚMERO DE LA ALMOHADILLA:

CLIP NUMBER:
NUMÉRO DU CROCHET:
NÚMERO DE CLIP:

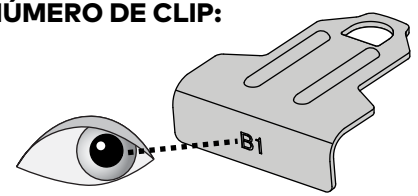

Look at the notes that apply to your vehicle.

Consultez les notes qui concernent votre véhicule.

Lea la información que se refiere a su vehículo.

If your vehicle doesn't appear here go to yakimatech.com

Si votre véhicule n'apparaît pas ici, consulter le site yakimatech.com

Si su vehículo no aparece aquí, visite yakimatech.com

	MAX. LBS.	M1			M2	P1	T1	M3			M4	P2	T2
					inches						inches		
--ACURA--													
RDX 5dr 2019-2026 (BaseLine)	165	BC174	B85	2	41 3/4	7	A	1	BC154	B74	1	38 1/2	32	C	2
RDX 5dr 2019-2026 (BaseLine FX)	165	BC174	B85	2	41 3/4	7	A	1	BC154	B74	1	38 1/2	32	C	2
--HYUNDAI--															
Elantra 5dr 2001-2006 (BaseLine)	165	BC185	B8	1	35 7/8	6	A	1	BC174	B85	2	35	32	C	2
Elantra 5dr 2001-2006 (BaseLine FX)	165	BC185	B8	1	35 7/8	6	A	1	BC174	B85	2	35	32	C	2
--LEXUS--															
ES 4dr 2007-2012 (BaseLine)	165	BC134	B2	2	40 3/4	5	A	1	BC174	B85	2	38 1/4	32	C	2
ES 4dr 2007-2012 (BaseLine FX)	165	BC134	B2	2	40 3/4	5	A	1	BC174	B85	2	38 1/4	32	C	2
LS 4dr 2007-2012 (BaseLine)	165	BC117	B7	2	40 1/2	6	A	1	BC174	B85	2	40 3/4	32	B	2
LS 4dr 2007-2012 (BaseLine FX)	165	BC117	B7	2	40 1/2	6	A	1	BC174	B85	2	40 3/4	32	B	2
--SCION--															
iM 5dr 2016-2016 (BaseLine)	165	BC174	B85	2	34	10	A	2	BC131	B62	5	31 1/4	30	C	2
iM 5dr 2016-2016 (BaseLine FX)	165	BC174	B85	2	34	10	A	2	BC131	B62	5	31 1/4	30	C	2
--TOYOTA--															
Corolla iM 5dr 2017-2018 (BaseLine)	165	BC174	B85	2	34	10	A	2	BC131	B62	5	31 1/4	30	C	2
Corolla iM 5dr 2017-2018 (BaseLine FX)	165	BC174	B85	2	34	10	A	2	BC131	B62	5	31 1/4	30	C	2
Prius V w/ Panoramic Roof 5dr 2012-2017 (BaseLine)	165	BC117	B7	2	39 1/2	13	A	1	BC174	B85	2	37 3/4	30	B	2
Prius V w/ Panoramic Roof 5dr 2012-2017 (BaseLine FX)	165	BC117	B7	2	39 1/2	13	A	1	BC174	B85	2	37 3/4	30	B	2
Prius V 5dr 2012-2017 (BaseLine)	165	BC117	B7	2	39 1/2	13	A	1	BC174	B85	2	37 3/4	30	B	2
Prius V 5dr 2012-2017 (BaseLine FX)	165	BC117	B7	2	39 1/2	13	A	1	BC174	B85	2	37 3/4	30	B	2
--VOLKSWAGEN--															
Golf GTI 3dr 2006-2009 (BaseLine)	165	BC134	B2	2	38 1/4	10	A	1	BC174	B85	2	34	32	B	2
Golf GTI 3dr 2006-2009 (BaseLine FX)	165	BC134	B2	2	38 1/4	10	A	1	BC174	B85	2	34	32	B	2

NOTES
NOTAS

	MAX. LBS.				M1	M2	P1	T1				M3	M4	P2	T2
Rabbit 3dr 2006-2009 (BaseLine)	165	BC134	B2	2	38 1/4	10	A	1	BC174	B85	2	34	32	B	2
Rabbit 3dr 2006-2009 (BaseLine FX)	165	BC134	B2	2	38 1/4	10	A	1	BC174	B85	2	34	32	B	2

NOTES
NOTAS

BaseClip Notes

NOTES
NOTAS

US NOTES

READ THE NOTES THAT APPLY TO YOUR VEHICLE:

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

60 - On this application, minimum bar size can be sized down when JetStream or CoreBar are used.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

70 - Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

112 - The sunroof/panoramic roof should not be opened while the rack and/or gear mounts are installed. You may remove the rack when not in use.

FR NOTES

RESPECTER LES NOTES DE MONTAGE S'APPLIQUANT À VOTRE VÉHICULE.

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

60 - On this application, minimum bar size can be sized down when JetStream or CoreBar are used.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

70 - Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

112 - The sunroof/panoramic roof should not be opened while the rack and/or gear mounts are installed. You may remove the rack when not in use.

ES NOTAS

LEA Y SIGA LAS OBSERVACIONES QUE CORRESPONDEN A SU VEHÍCULO.

2 - HullRaiser and HighRoller require one set of MightyMount 39H (PN 8003539) to be compatible with Yakima CoreBar, JetStream bars and FX systems.

5 - HullyRollers, MultiMount, and Mako Saddles require one set of MightyMount 39H (PN 8003539) per pair to be compatible with Yakima CoreBar, JetStream bars and FX systems.

14 - Using Yakima RoundBars with Yakima BaseLine, TimberLine, SkyLine, RidgeLine, or SightLine towers will require the purchase of RoundBar SL Adapter (PN 8003536) sold separately.

54 - Caution! when open, sunroof or panoramic roof may interfere with some accessories.

60 - On this application, minimum bar size can be sized down when JetStream or CoreBar are used.

69 - Visit https://yakweb-assets.s3.amazonaws.com/HatchClearance.pdf for rear hatch clearance information regarding cargo boxes.

70 - Caution! Proper tower balance and tower placement is critical for this installation. Be sure that racks remain centered on the vehicle throughout installation. Take note, when tensioning the system, be sure to alternate between both sides evenly.

81 - All loads extending beyond the length of the roof (except cargo boxes) must be secured to both the front and rear of the vehicle, in addition to the rack.

82 - SideWinder (Tandem Bike Mount) is compatible with Yakima RoundBar only.

103 - Please check your vehicle's front bar to hatch measurement as well as the ShowBoat 66" instructions, found here http://assets.yakima.com/Product/instructions/8004068/1, to ensure compatibility with your target boat weight, roller extension, and vehicle.

109 - Always be sure to tie down your SUP as per instructions. SupPup and SupDawg require using nose tie down strap.

110 - If your vehicle is equipped with a sunroof or panoramic glass roof, prior to operation, ensure adequate clearance exists with roof rack and/or accessories installed.

112 - The sunroof/panoramic roof should not be opened while the rack and/or gear mounts are installed. You may remove the rack when not in use.

BaseClip Notes

NOTES
NOTAS

US NOTES

READ THE NOTES THAT APPLY TO YOUR VEHICLE:

117 - For use with with your LockNLoad platform, this application requires 2 pairs of LockNLoad Crossbar Clamps PN 8005039.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

150 - Min 30” crossbar spread required for boat and surf products on this application.

171 - Large Cargo Boxes such as Skybox 12/18/21/Lo and DoubleHaul will interfere with your hatch opening all the way. Use caution if attaching these boxes.

187 - Boa and ForkChop bike mounts will not work on this application due to crossbar spread limitations.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24” – 50”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.

FR NOTES

RESPECTER LES NOTES DE MONTAGE S’APPLIQUANT À VOTRE VÉHICULE.

117 - For use with with your LockNLoad platform, this application requires 2 pairs of LockNLoad Crossbar Clamps PN 8005039.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

150 - Min 30” crossbar spread required for boat and surf products on this application.

171 - Large Cargo Boxes such as Skybox 12/18/21/Lo and DoubleHaul will interfere with your hatch opening all the way. Use caution if attaching these boxes.

187 - Boa and ForkChop bike mounts will not work on this application due to crossbar spread limitations.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24” – 50”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.

ES NOTAS

LEA Y SIGA LAS OBSERVACIONES QUE CORRESPONDEN A SU VEHÍCULO.

117 - For use with with your LockNLoad platform, this application requires 2 pairs of LockNLoad Crossbar Clamps PN 8005039.

132 - Any load/mount extending beyond the rear hatch seam may cause interference.

150 - Min 30” crossbar spread required for boat and surf products on this application.

171 - Large Cargo Boxes such as Skybox 12/18/21/Lo and DoubleHaul will interfere with your hatch opening all the way. Use caution if attaching these boxes.

187 - Boa and ForkChop bike mounts will not work on this application due to crossbar spread limitations.

191 - Limited to 2 surf/sail/paddleboards. Boards must be stacked - NEVER carry side-by-side.

604 - RoadShower SM and MD can accommodate crossbar spreads of 24” – 50”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

607 - RoadShower LG can accommodate crossbar spreads of 32” - 78”. The distance from the front or rear clamp to the end of the shower must not be greater than 30”. Do not mount RoadShower outboard of tower.

611 - OverNOut 180, 270 XL, 270 LG can accommodate crossbar spreads of 26" - 76". The distance from the front or rear clamp to the end of the awning must not be greater than 50". Do not mount greater than 1" outboard of tower.